

## Noryl\* Resin 725A

## Europe-Africa-Middle East: COMMERCIAL

NORYL 725A is an unfilled material, with a Vicat B/120 of 135°C according ISO 306. NORYL 725A has been designed for use in automotive interior applications, where anti-squeak is required.

### Property

| TYPICAL PROPERTIES <sup>(1)</sup>           |           |                         |                |
|---|-----------|-------------------------|----------------|
| MECHANICAL                                  | Value     | Unit                    | Standard       |
| Taber Abrasion, CS-17, 1 kg                 | 40        | mg/1000cy               | SABIC Method   |
| Tensile Stress, yield, 50 mm/min            | 50        | MPa                     | ISO 527        |
| Tensile Stress, break, 50 mm/min            | 45        | MPa                     | ISO 527        |
| Tensile Strain, yield, 50 mm/min            | 3         | %                       | ISO 527        |
| Tensile Strain, break, 50 mm/min            | 45        | %                       | ISO 527        |
| Tensile Modulus, 1 mm/min                   | 2300      | MPa                     | ISO 527        |
| Flexural Stress, yield, 2 mm/min            | 65        | MPa                     | ISO 178        |
| Flexural Modulus, 2 mm/min                  | 2100      | MPa                     | ISO 178        |
| Hardness, H358/30                           | 90        | MPa                     | ISO 2039-1     |
| IMPACT                                      | Value     | Unit                    | Standard       |
| Izod Impact, notched 80*10*4 +23°C          | 15        | kJ/m <sup>2</sup>       | ISO 180/1A     |
| Izod Impact, notched 80*10*4 -30°C          | 9         | kJ/m <sup>2</sup>       | ISO 180/1A     |
| Charpy 23°C, V-notch Edgew 80*10*4 sp=62mm  | 17        | kJ/m <sup>2</sup>       | ISO 179/1eA    |
| Charpy -30°C, V-notch Edgew 80*10*4 sp=62mm | 10        | kJ/m <sup>2</sup>       | ISO 179/1eA    |
| THERMAL                                     | Value     | Unit                    | Standard       |
| Thermal Conductivity                        | 0.24      | W/m.°C                  | ISO 8302       |
| CTE, 23°C to 80°C, flow                     | 7.E-05    | 1/°C                    | ISO 11359-2    |
| CTE, 23°C to 80°C, xflow                    | 9.E-05    | 1/°C                    | ISO 11359-2    |
| Ball Pressure Test, 75°C +/- 2°C            | PASSES    | -                       | IEC 60695-10-2 |
| Vicat Softening Temp, Rate A/50             | 140       | °C                      | ISO 306        |
| Vicat Softening Temp, Rate B/50             | 130       | °C                      | ISO 306        |
| Vicat Softening Temp, Rate B/120            | 135       | °C                      | ISO 306        |
| HDT/Be, 0.45MPa Edgew 120*10*4 sp=100mm     | 125       | °C                      | ISO 75/Be      |
| HDT/Ae, 1.8 MPa Edgew 120*10*4 sp=100mm     | 110       | °C                      | ISO 75/Ae      |
| PHYSICAL                                    | Value     | Unit                    | Standard       |
| Mold Shrinkage on Tensile Bar, flow (2)     | 0.5 - 0.7 | %                       | SABIC Method   |
| Density                                     | 1.06      | g/cm <sup>3</sup>       | ISO 1183       |
| Water Absorption, (23°C/sat)                | 0.22      | %                       | ISO 62         |
| Moisture Absorption (23°C / 50% RH)         | 0.06      | %                       | ISO 62         |
| Melt Volume Rate, MVR at 280°C/5.0 kg       | 10        | cm <sup>3</sup> /10 min | ISO 1133       |
| ELECTRICAL                                  | Value     | Unit                    | Standard       |
| Volume Resistivity                          | 1.E+15    | Ohm-cm                  | IEC 60093      |
| Surface Resistivity, ROA                    | >1.E+15   | Ohm                     | IEC 60093      |
| Dielectric Strength, in oil, 3.2 mm         | 17        | kV/mm                   | IEC 60243-1    |
| Relative Permittivity, 50/60 Hz             | 2.5       | -                       | IEC 60250      |
| Relative Permittivity, 1 MHz                | 2.5       | -                       | IEC 60250      |
| Dissipation Factor, 50/60 Hz                | 0.003     | -                       | IEC 60250      |
| Dissipation Factor, 1 MHz                   | 0.001     | -                       | IEC 60250      |

|   |     |       |                |
|---|-----|-------|----------------|
| Comparative Tracking Index                    | 175 | V     | IEC 60112      |
| FLAME CHARACTERISTICS                         |     | Value | Unit           |
| UL Compliant, 94HB Flame Class Rating (3)(4)  | 1.6 | mm    | UL 94 by GE    |
| Glow Wire Flammability Index 650°C, passes at | 3.2 | mm    | IEC 60695-2-12 |
| Oxygen Index (LOI)                            | 22  | %     | ISO 4589       |

Source GMD, last updated:02/15/1995

## Processing

| Parameter                   | Value     | Unit |
|-----------------------------|-----------|------|
| Injection Molding           |           |      |
| Drying Temperature          | 100 - 120 | °C   |
| Drying Time                 | 2 - 3     | hrs  |
| Melt Temperature            | 280 - 300 | °C   |
| Nozzle Temperature          | 260 - 280 | °C   |
| Front - Zone 3 Temperature  | 280 - 300 | °C   |
| Middle - Zone 2 Temperature | 260 - 280 | °C   |
| Rear - Zone 1 Temperature   | 240 - 260 | °C   |
| Hopper Temperature          | 60 - 80   | °C   |
| Mold Temperature            | 80 - 120  | °C   |

Source GMD, last updated:02/15/1995


### CALCULATED FLOW LENGTH INDICATION

Moldflow® Radial Flow Analysis

LNP Staramide DBG014

Melt Temperature : 270°C

Mold Temperature : 95°C

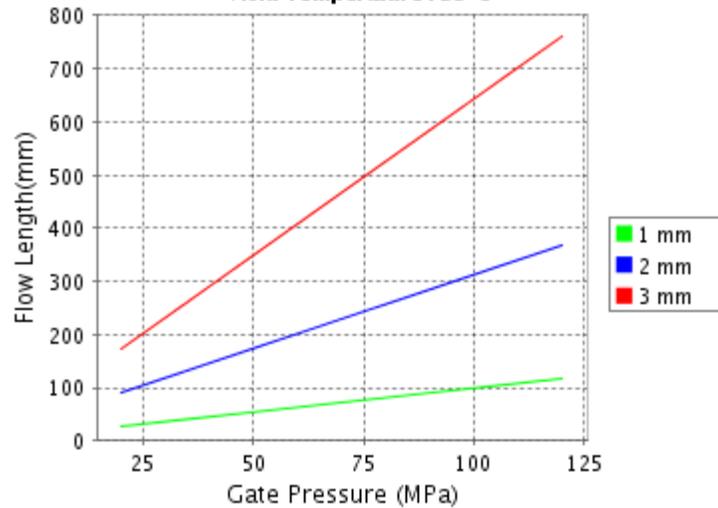

**Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.**

® Moldflow is a registered trademark of the Moldflow Corporation.

THESE PROPERTY VALUES ARE NOT INTENDED FOR SPECIFICATION PURPOSES.

PLEASE CHECK WITH YOUR [\(LOCAL SALES OFFICE\)](#) FOR AVAILABILITY IN YOUR REGION

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

**Disclaimer :** All information, recommendation or advice given by SABIC Innovative Plastics, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products by the user is beyond the control of SABIC Innovative Plastics Company, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC Innovative Plastics Company, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC Innovative Plastics Company or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection.

\* Noryl is a trademark of the SABIC Innovative Plastics Company

© 1997-2008 SABIC Innovative Plastics Company.All rights reserved